



## **COMMANDO LightningFIBER 10/25GBASE-LR SFP-LR-25G Data Sheet**



## Contents

Product Overview

Product Highlights

Features and Benefits

Hardware

Specifications

Support and Warranty

Ordering Information

Document History

## Product Overview

COMMANDO LightningFIBER SFP-LR-25G, SFP28 (Small Form-factor Pluggable Twenty eight) operates at 1310nm is on single mode fiber transceiver based on IEEE 802.3cc and IEEE 802.3ae standard and are compliant with SFF-8402, SFF-8432 and SFF-8472, providing a faster and reliable interface for 10G/25G Ethernet applications up to 10Km. The product implements digital diagnostics via a 2-wire serial bus and is compliant with the SFF-8472 standard..

The module is designed to offer multi-vendor compatibility offering users flexibility, scalability without incurring additional overhead and increasing interoperability.

COMMANDO SFP28 transceiver module is for transmission at 1310nm over Single Mode fiber. It is compliant with with SFF-8402, SFF-8432 and SFF-8472, IEEE 802.3ae IEEE 802.3cc Ethernet standards which make it ideally suited for data communications. The SFP28 transceiver is featured with low-power, high-density and high-speed and offers an efficient way to help your IT infrastructure to be quickly scaled up and ready for up to 10/25Gbps transmission. It supports up to 10Km link lengths over LC duplex SMF fiber. It offers customers a wide variety of 10G and 25G dual rate applications connectivity to multi-vendor equipment like routers, switches, server, NICs of data center, enterprise wiring closet, and service provider transport applications. It is ideal for Internet Service Provider (ISP) Gigabit Ethernet communication links, Enterprise LAN & SAN Networks, Data Center LAN & SAN networks, and other optical links. It can be used as uplinks for 10G/25G Gbps Small Form-Factor Pluggable Twenty eight (SFP28) Fiber Network Module for delivering robust performance and Cloud networking needs of growing businesses, data centers and high-end campus networks.

## Product Highlights

- Multi-vendor platform compatible
- Up to 10km on SMF
- Supports data rate 24.3Gbps - 26.5Gbps with CDR engaged mode and data rate 9.95Gbps - 10.31Gbps with CDR bypassed mode
- Hot-pluggable SFP28 footprint
- 1310nm DFB laser transmitter and PIN PD Receiver
- Duplex LC connector
- Compliant with IEEE 802.3cc, IEEE 802.3ae, 10GBASE-LR and 25GBASE-LR
- Compliant with SFF-8402, SFF-8432 and SFF-8472
- Built-in Digital Diagnostic functions
- Internal CDR on both Transmitter and Receiver channel
- Application to 25GBASE-LR, 10GBASE-LR and CPRI and eCPRI Wireless Networks
- Single power supply 3.3V
- RoHS Compliant
- Operating temperature range (Case Temperature): 0°C to 70°C
- Standard and compact size, fully metallic enclosure for Low EMI

## Features and Benefits

**Easy to Use:** COMMANDO SFP28 Transceivers are easy to use with simple and hassle-free setup. Its compact and standard size makes it ideal for all top brand devices along with COMMANDO products. Easy Installation, Plug-and-play installation with no configuration required.

**25/10 Gigabit speed with Reliable performance:** It provides and offers 25/10Gbps speed and supports high data rates 24.33G/25.78G(CPRI options 10/25GbE) and low data rates 9.95G/10.31G(10GbE-LW/LR) CDRs at transmitter and receiver are configured according to different signal rates. These SFP28 are well built and rigorously tested and can sustain in very rough environment to provide reliable performance.

**Dust proof Enclosure:** It has a resilient dust proof enclosure protects against harsh outdoor condition with no ingress of dust.

**Support uninterrupted critical network infrastructure:** It is protected from any hardware failures with Extra Long operational life. With this feature protect on cost and the impact to your business by losing these network devices and thus the users/servers connected to them.

**Cost Efficient:** State of art quality product that can serve with world's top brand products along with COMMANDO devices on real time high-speed Performance, highly reliable, conformance to international open standards, durable, serviceable, aesthetics, perceived quality, enhanced performance leads to value to money.

**Green Technology:** It automatically adjusts power consumption according to the link status to limit the carbon footprint of your network. It also complies with RoHS, prohibiting the use of certain hazardous materials. Moreover, most of the packaging material can be recycled and reused.

# Hardware

## High Performance

- Low power consumption <1W typically, saving power
- 100us typical latency, MTBF over 1 million hours
- SFP28 Multi source Agreement (MSA) Compliant
- Input Voltage: 3.1V DC to 3.5V DC Maximum / 3.3V DC Typical.
- Input Current 300mA Maximum / 200mA Typical.

## Extra Long operational life

- Stainless steel material
- Anti-corrosion and salt spray resistance
- Storage Relative Humidity: 5% to 95%
- Exceptional Performance in Harsh Outdoor Climates with dust proof enclosure ensuring it can withstand harsh outdoor and indoor environments.

## Operating temperature range

- Commercial temperature range: 0 to 70°C (32 to 158°F)
- COMMANDO Extended temperature range: -5°C to 85°C (23 to 185°F)
- Storage temperature range: -40 to 85°C (-40 to 185°F)

Table 1 COMMANDO SFP28 Hardware Specifications Comparison

| Product Code  | Form Factor     | Maximum Speed | IEEE Standard Compliance | Connector Type  | TX Power (dBm) | Receiver Sensitivity (dBm) |
|---------------|-----------------|---------------|--------------------------|-----------------|----------------|----------------------------|
| SFP-SM-1G     | SFP             | 1000Mbps      | 1000BASE-LX/LH           | LC duplex       | -9.5 ~ -3dBm   | < -23dBm                   |
| SFP-MM-1G     | SFP             | 1000Mbps      | 1000BASE-SX              | LC duplex       | -9.5 ~ -3dBm   | < -17dBm                   |
| SFP-UTP-1G    | GBIC-T, SFP     | 1000Mbps      | 1000BASE-T               | RJ-45           | Standard       | <1W                        |
| SFP-SR-10G    | SFP+            | 10.3125Gbps   | 10GBASE-SR               | LC Duplex       | -7.3~-1dBm     | < -11.1dBm                 |
| SFP-LR-10G    | SFP+            | 10.3125Gbps   | 10GBASE-LR               | LC Duplex       | -8.2~-0.5dBm   | <-14.4dBm                  |
| SFP-ER-10G    | SFP+            | 10.3125Gbps   | 10GBASE-ER               | LC Duplex       | -7.3~-1dBm     | < -11.1dBm                 |
| SFP-ZR-10G    | SFP+            | 11.3Gbps      | 10GBASE-ZR               | LC Duplex       | 0~5dBm         | <-23dBm                    |
| SFP-UTP-10G   | 10GBASE-T, SFP+ | 10Gbps        | 10GBASE-T                | Copper CAT 6a/7 | Standard       | <1W                        |
| SFP-SR-25G    | SFP28           | 25.78Gbps     | 25GBASE-SR               | LC Duplex       | -9.40 -- 3.40  | -10.3dBm                   |
| SFP-LR-25G    | SFP28           | 26.5Gbps      | 25GBASE-LR               | LC Duplex       | -7.97-- 2.8    | 14.4/-13.3dBm              |
| QSFP-SR4-40G  | QSFP+           | 41.2Gbps      | 40GBASE-SR4              | MTP/MPO-12 Male | -7.6~1dBm      | <-11.1dBm                  |
| QSFP-LR4-40G  | QSFP+           | 44.6Gbps      | 40GBASE-LR4              | LC duplex       | -7~2.3dBm      | <-11.5dBm                  |
| QSFP-SR4-100G | QSFP28          | 103.1 Gbps    | 100GBASE-SR4             | MTP/MPO-12      | -8.4~2.4dBm    | <-10.3dBm                  |
| QSFP-LR4-100G | QSFP28          | 103.125Gbps   | 100GBASE-LR4             | LC duplex       | -4.3~4.5dBm    | <-10.6dBm                  |

## Specifications

COMMANDO SFP-LR-25G SFP28 is used for speed 25/10Gbps Ethernet fiber speed and It is a compact, hot-swappable device that plugs into a physical port of a network device. SFP+ optics are used in communication networks and have a transmitting side (Tx) and a receiving side (Rx) work with 1310nm wavelengths & supports up to 10Km link lengths over LC duplex SMF fiber.

Table 2. COMMANDO SFP28 Model Comparison

| <b>Product Code</b> | <b>Center Wavelength (nm)</b> | <b>Media Type</b>  | <b>Max Transmission Distance</b> | <b>Digital Diagnostics Monitoring Supported</b> |
|---------------------|-------------------------------|--------------------|----------------------------------|---|
| <b>SFP-SM-1G</b>    | GBIC-LX/LH, 1310nm            | MMF/SMF            | 550m/20km                        | DDM   |
| <b>SFP-MM-1G</b>    | GBIC-SX, 850nm                | MMF                | 550m                             | DDM   |
| <b>SFP-UTP-1G</b>   | GBIC-T, RJ-45                 | Copper             | 100m                             | Standard  |
| <b>SFP-SR-10G</b>   | 10GBASE-SR, 850nm             | MMF                | 300m                             | DDM   |
| <b>SFP-LR-10G</b>   | 10GBASE-LR, 1310nm            | SMF                | 20km                             | DDM   |
| <b>SFP-ER-10G</b>   | 10GBASE-ER, 1550nm            | SMF                | 40km                             | DDM   |
| <b>SFP-ZR-10G</b>   | 10GBASE-ZR/ZW, 1550nm         | SMF                | 80km                             | DDM   |
| <b>SFP-UTP-10G</b>  | 10GBASE-T RJ-45               | Copper<br>CAT 6a/7 | 80m                              | Standard  |

|                      |                               |                 |         |     |
|----------------------|-------------------------------|-----------------|---------|-----|
| <b>SFP-SR-25G</b>    | 25GBASE-SR, 850nm             | MMF             | 70/100m | DDM |
| <b>SFP-LR-25G</b>    | 10GBASE-LR/25GBASE-LR, 1310nm | SMF             | 10km    | DDM |
| <b>QSFP-SR4-40G</b>  | 40GBASE-SR4, 850nm            | MMF             | 100m    | DDM |
| <b>QSFP-LR4-40G</b>  | 40GBASE-LR4, 1310nm           | SMF             | 10km    | DDM |
| <b>QSFP-SR4-100G</b> | 100GBASE-SR4, 850nm           | MTP/MPO-12, MMF | 100m    | DDM |
| <b>QSFP-LR4-100G</b> | 100GBASE-LR4, 1310nm          | LC Duplex, SMF  | 10km    | DDM |

## General Specifications

| Parameter                                     | Symbol           | Min  | Typ  | Max                | Unit | Remarks |
|---|------------------|------|------|--------------------|------|---------|
| Data Rate1                                    | DR1              | 24.3 | -    | 26.5               | Gb/s | 1       |
| Data Rate2                                    | DR2              | 9.95 | -    | 10.31              | Gb/s | 2       |
| Bit Error Rate1                               | BER1             | -    | -    | $5 \times 10^{-5}$ | -    | 3       |
| Bit Error Rate2                               | BER2             | -    | -    | $10^{-12}$         | -    | 4       |
| Operating Temperature                         | T <sub>c</sub>   | 0    | -    | 70                 | °C   | 5       |
|   |                  | -40  | -    | 85                 | °C   | 5       |
| Storage Temperature                           | T <sub>STO</sub> | -40  | -    | 85                 | °C   | 6       |
| Supply Current<br>(Commercial<br>Temperature) | I <sub>CC</sub>  | -    | 200  | 350                | mA   | 7       |
| Supply Current<br>(Industrial<br>Temperature) | I <sub>CC</sub>  | -    | 200  | 400                | mA   | 7       |
| Input Voltage                                 | V <sub>CC</sub>  | 3.14 | 3.3  | 3.46               | V    | -       |
| Power Dissipation<br>(Commercial              | P <sub>C</sub>   | -    | 0.75 | 1.1                | W    | -       |

|  |                  |      |      |     |   |   |
|--|------------------|------|------|-----|---|---|
| Temperature)                                     |                  |      |      |     |   |   |
| Power Dissipation<br>(Industrial<br>Temperature) | P <sub>I</sub>   | -    | 0.75 | 1.2 | W | - |
| Maximum Voltage                                  | V <sub>MAX</sub> | -0.5 | -    | 4   | V | 7 |

#### Notes:

1. IEEE 802.3cc & IEEE 802.3ae
2. Measured with data rate at 25.78Gb/s, PRBS 2<sup>31</sup> 1
3. Measured with data rate at 10.31Gb/s, PRBS 2<sup>31</sup> 1
4. Case temperature
5. .Ambient temperature
6. For electrical power interface

#### Link Distances

| Data Rate                | Fiber Type  | Distance Range<br>(km) | Remarks |
|--------------------------|-------------|------------------------|---------|
| 10.31 Gb/s or 25.78 Gb/s | 9/125um SMF | 10                     | 1       |

#### Note:

1. This module requires RS-FEC on the host ports for operation at 25G

#### Optical – Characteristics – Transmitter

V<sub>CC</sub>=3.14V to 3.46V, T<sub>C</sub>

| Parameter  | Symbol | Min  | Typ | Max | Unit | Remarks |
|--|--------|------|-----|-----|------|---------|
| Output Optical Power<br>(24.33Gb/s - 25.78Gb/s ) | PTX1   | -7   | -   | 2   | dBm  | 1       |
| Output Optical Power<br>(9.95Gb/s - 10.31Gb/s)   | PTX2   | -8.2 | -   | 0.5 | dBm  | 1       |

|                                    |                 |      |      |      |     |   |
|------------------------------------|-----------------|------|------|------|-----|---|
| Optical Center Wavelength          | $\lambda_c$     | 1295 | 1310 | 1325 | nm  | - |
| Transmitter and Dispersion Penalty | TDP             | -    | -    | 2.7  | dB  | - |
| Extinction Ratio                   | ER              | 3.5  | -    | -    | dB  | - |
| Spectral Width (-20dB)             | $\Delta\lambda$ | -    | -    | 1    | nm  | - |
| Side Mode Suppression Ratio        | SMSR            | 30   |      |      | dB  | - |
| Transmitter Reflectance            | -               | -    | -    | -12  | dB  | - |
| Launch Power of OFF Transmitter    | POUT_OFF        | -    | -    | -30  | dBm | 1 |

**Notes:**

1. Average

**Optical – Characteristics – Receiver**

$V_{CC}=3.14V$  to  $3.46V$ ,  $T_c$

| Parameter                       | Symbol           | Min  | Typ | Max   | Unit | Remarks |
|---------------------------------|------------------|------|-----|-------|------|---------|
| Optical Center Wavelength       | $\lambda_c$      | 1260 | -   | 1390  | nm   | -       |
| Receive Overload                | POL              | 2    | -   | -     | dBm  | -       |
| Receiver Sensitivity @25.78Gb/s | RX_SEN1          | -    | -   | -13.3 | dBm  | 1       |
| Receiver Sensitivity @10.31Gb/s | RX_SEN2          | -    | -   | -14.4 | dBm  | 2       |
| Receiver Reflectance            | TR <sub>RX</sub> | -    | -   | -26   | dB   | -       |
| LOS Assert                      | LOS <sub>A</sub> | -30  | -   | -     | dBm  | -       |
| LOS De-Assert                   | LOS <sub>D</sub> | -    | -   | -17   | dBm  | -       |
| LOS Hysteresis                  | LOS <sub>H</sub> | 0.5  | -   | -     | dB   | -       |

**Notes:**

1. Average, measured with data rate at 25.78Gb/s, PRBS 2<sup>31</sup>-1.
2. Average, measured with data rate at 10.31Gb/s, PRBS 2<sup>31</sup>-1.

## Electrical – Characteristics – Transmitter

$V_{CC}=3.14V$  to  $3.46V$ ,  $T_C$

| Parameter                     | Symbol          | Min             | Typ | Max                  | Unit     | Remarks |
|-------------------------------|-----------------|-----------------|-----|----------------------|----------|---------|
| Input differential impedance  | RIN             | -               | 100 |                      | $\Omega$ | -       |
| Differential data input swing | VIN PP          | 200             | -   | 900                  | mV       | -       |
| Transmit Disable Voltage      | V <sub>D</sub>  | 2               | -   | V <sub>CC</sub>      | V        | -       |
| Transmit Enable Voltage       | V <sub>EN</sub> | V <sub>EE</sub> | -   | V <sub>EE</sub> +0.8 | V        | -       |

## Electrical – Characteristics – Receiver

$V_{CC}=3.14V$  to  $3.46V$ ,  $T_C$

| Parameter                      | Symbol  | Min             | Typ | Max                     | Unit | Remarks |
|--------------------------------|---------|-----------------|-----|-------------------------|------|---------|
| Differential data output swing | VOUT PP | 300             | -   | 1000                    | mV   | -       |
| LOS Assert                     | VLOS A  | 2               | -   | V <sub>CC</sub><br>HOST | V    | -       |
| LOS De-Assert                  | VLOS D  | V <sub>EE</sub> | -   | V <sub>EE</sub> +0.8    | V    | -       |

## Digital Diagnostic Monitor (DDM) Functions

COMMANDO SFP-25G-LR transceiver module supports the 2-wire serial communication protocol as defined in SFF-8472. Digital diagnostic information is accessible over the 2-wire interface at address 0xA2. Digital diagnostics for the transceiver are internally calibrated by default. A micro controller unit inside the transceiver gathers the monitoring information and reports the status of transceiver, such as Transceiver Temperature, Supply Power, TX bias current, TX output power and RX received optical power.

## DDM Threshold Information


| Parameter        |   | Alarm Threshold |               | Warning Threshold |               |
|------------------|---|-----------------|---------------|-------------------|---------------|
|                  |   | High Value      | Low Value     | High Value        | Low Value     |
| Temperature (°C) | C | 90 (5A 00)      | -10 (F6 00)   | 85 (55 00)        | -5 (FB 00)    |
|                  | I | 90 (5A 00)      | -45 (D3 00)   | 85 (55 00)        | -40 (D8 00)   |
| Vcc (V)          |   | 3.63(8D CC)     | 2.97 (74 04)  | 3.46(87 28)       | 3.13 (7A 44)  |
| Bias (mA)        |   | 100(C3 50)      | 2 (03 E8)     | 80 (9C 40)        | 4 (07 D0)     |
| TxPower (dBm)    |   | 2.8 (4A 4A)     | -7.97 (06 3C) | 2.0 (3D E8)       | -7.0 (07 CB)  |
| RxPower (dBm)    |   | 3.5 (57 A8)     | -18.0 (00 9E) | 0.5 (2B D4)       | -15.0 (01 3C) |

## Product Weight

Net weight of module : 18.0g/pcs

Net weight of dust cap : 0.95g/pcs

## Dimensions

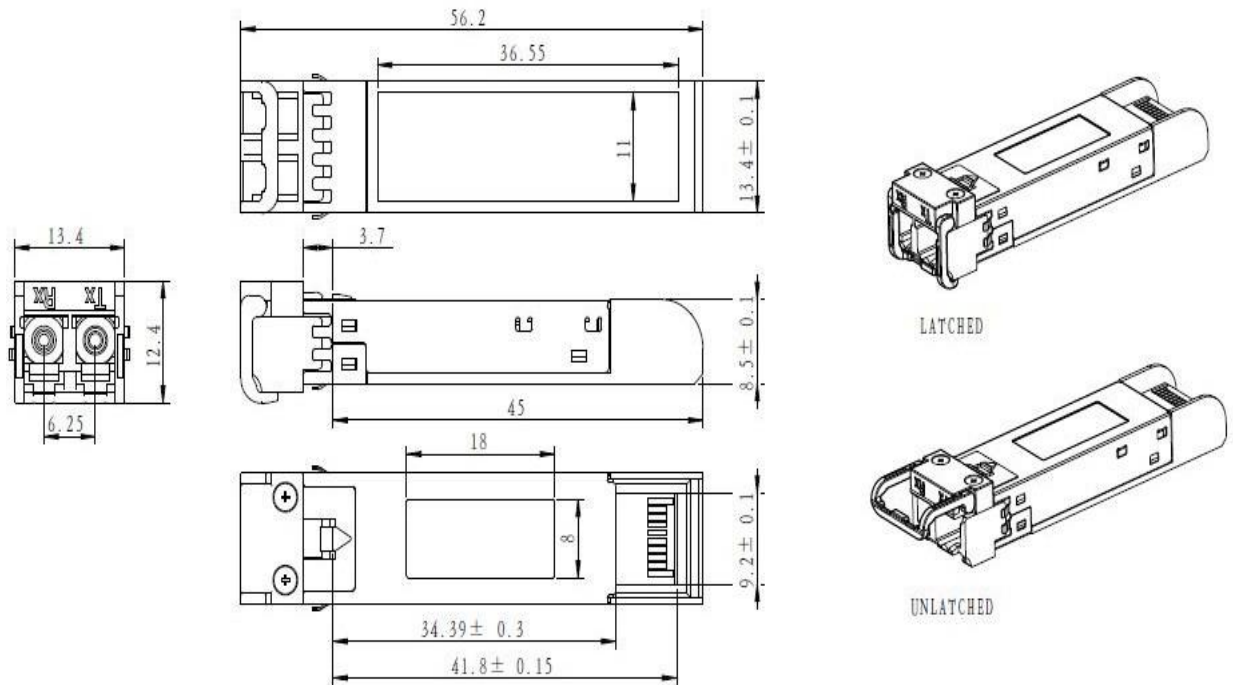

All dimensions are ±0.2mm unless specified otherwise

Unit: mm

## Included in the bundle/box

All COMMANDO SFP-LR-25G, SFP28 Transceivers are made available for use globally along with accessory used to facilitate or enhance operations. COMMANDO SFP-LR-25G, SFP28 Transceivers Comes with following Accessories.

1x (COMMANDO 25G SFP28 Transceiver Module) SFP-LR-25G

## Support and Warranty

- Same-day assistance.
- Comprehensive 24-hour support using common communication/chat platforms, Email and Telephone.
- Provide FAQs and troubleshooting help online (self-service) through cloud-based solutions.
- Highly technical and trained representatives to resolve issues.
- One-year default warranty with option of warranty extension up to 3 years

COMMANDO WarrantyX Program available on: [www.commandonetworks.com/warranty](http://www.commandonetworks.com/warranty)

**Table 3. Support and Warranty**

| <b>Warranty and Support</b> |   |
|-----------------------------|---|
| Products covered            | COMMANDO LightningFIBER 10/25GBASE-LR, SFP28, 1310nm, 10km, SMF, DDM (SFP-LR-25G)   |
| Warranty duration           | One Year RTB (Return To Base) replacement warranty – optionally extendable up to 3 years.   |
| Hardware replacement        | COMMANDO, its resellers or its service center will use commercially reasonable efforts to replace the product subject to stock availability. Otherwise, a replacement will be arranged within 15 working days after receipt of the Return Materials Authorization (RMA) request.                                      |
| End-of-life policy          | In case of discontinuation of the product, support is limited to 3 years from announcement date.  |
| Effective date              | Hardware warranty commences from the date of shipment to customer (and in case of resale by a COMMANDO reseller, not more than 90 days after original shipment by COMMANDO).  |
| Support duration            | Lifetime support.   |
| COMMANDO Care               | COMMANDO will provide 24x7 support for basic configuration, diagnosis, and troubleshooting of device-level problems for up to one year from the date of shipment of the originally purchased product. This support does not include solution or network-level support beyond the specific device under consideration. |
| Online Portal Access        | Warranty allows guest access to <a href="http://commandonetworks.com">commandonetworks.com</a> for all available technical queries.   |

## Ordering Information

Ordering information for the COMMANDO SFP-LR-25G, SFP28 Transceivers, To place an order, please contact your local reseller/distributor or COMMANDO Sales Representative at [www.commandonetworks.com/catalog](http://www.commandonetworks.com/catalog)

Table 4. Ordering Information

| Product Code         | Description  |
|----------------------|--|
| <b>SFP-SM-1G</b>     | COMMANDO LightningFIBER 1000BASE-LX/LH, SFP, 1310nm, 20km, SMF, DDM                                |
| <b>SFP-MM-1G</b>     | COMMANDO LightningFIBER 1000BASE-SX, SFP, 850nm, 550m, MMF, DDM                                    |
| <b>SFP-UTP-1G</b>    | COMMANDO LightningCOPPER 1000BASE-T SFP, Copper, RJ-45, 100m, Standard                             |
| <b>SFP-SR-10G</b>    | COMMANDO LightningFIBER 10GBASE-SR, SFP+, 850nm, 300m, MMF, DDM                                    |
| <b>SFP-LR-10G</b>    | COMMANDO LightningFIBER 10GBASE-LR, SFP+, 1310nm, 20km, SMF, DDM                                   |
| <b>SFP-ER-10G</b>    | COMMANDO LightningFIBER 10GBASE-ER, SFP+, 1550nm, 40km, SMF, DDM                                   |
| <b>SFP-ZR-10G</b>    | COMMANDO LightningFIBER 10GBASE-ZR/ZW, SFP+, 1550nm, 80km, SMF, DDM                                |
| <b>SFP-UTP-10G</b>   | COMMANDO LightningCOPPER 10GBASE-T Copper RJ-45, SFP+, Up to 80m, CAT 6a/7                         |
| <b>SFP-SR-25G</b>    | COMMANDO LightningFIBER 25GBASE-SR, SFP28, 850nm, 70/100m, OM3/4 MMF, DDM, Multi-vendor Compatible |
| <b>SFP-LR-25G</b>    | COMMANDO LightningFIBER 10/25GBASE-LR, SFP28, 1310nm, 10km, SMF, DDM, Multi-vendor Compatible      |
| <b>QSFP-SR4-40G</b>  | COMMANDO LightningFIBER 40GBASE-SR4, QSFP+, 850nm, 100m, MMF, DDM                                  |
| <b>QSFP-LR4-40G</b>  | COMMANDO LightningFIBER 40GBASE-LR4, QSFP+, 1310nm, 10km, SMF, DDM                                 |
| <b>QSFP-SR4-100G</b> | COMMANDO LightningFIBER 100GBASE-SR4, QSFP28+, 850nm, 100m, MTP/MPO-12, MMF, DDM                   |
| <b>QSFP-LR4-100G</b> | COMMANDO LightningFIBER 100GBASE-LR4, QSFP28+, 1310nm, 10km, SMF, DDM                              |

# Document History

| Release   | What's new                          | Date               |
|-----------|-------------------------------------|--------------------|
| Release 1 | First Release                       | March 24, 2021     |
| Release 2 | Multi-brand compatible model launch | November 9, 2022   |
| Release 3 | Model adjustment                    | September 18, 2023 |
| Release 4 | 25G Model added                     | October 13, 2023   |