



COMMANDO FiberX 10/25GBASE-LR SFP-LR-25G Data Sheet



Contents

Product Overview

Product Highlights

Features and Benefits

Hardware

Specifications

Support and Warranty

Ordering Information

Document History

Product Overview

COMMANDO FiberX SFP-LR-25G, SFP28 (Small Form-factor Pluggable Twenty eight) operates at 1310nm is on single mode fiber transceiver based on IEEE 802.3cc and IEEE 802.3ae standard and are compliant with SFF-8402, SFF-8432 and SFF-8472, providing a faster and reliable interface for 10G/25G Ethernet applications up to 10Km. The product implements digital diagnostics via a 2-wire serial bus and is compliant with the SFF-8472 standard..

The module is designed to offer multi-vendor compatibility offering users flexibility, scalability without incurring additional overhead and increasing interoperability.

COMMANDO SFP28 transceiver module is for transmission at 1310nm over Single Mode fiber. It is compliant with with SFF-8402, SFF-8432 and SFF-8472, IEEE 802.3ae IEEE 802.3cc Ethernet standards which make it ideally suited for data communications. The SFP28 transceiver is featured with low-power, high-density and high-speed and offers an efficient way to help your IT infrastructure to be quickly scaled up and ready for up to 10/25Gbps transmission. It supports up to 10Km link lengths over LC duplex SMF fiber. It offers customers a wide variety of 10G and 25G dual rate applications connectivity to multi-vendor equipment like routers, switches, server, NICs of data center, enterprise wiring closet, and service provider transport applications. It is ideal for Internet Service Provider (ISP) Gigabit Ethernet communication links, Enterprise LAN & SAN Networks, Data Center LAN & SAN networks, and other optical links. It can be used as uplinks for 10G/25G Gbps Small Form-Factor Pluggable Twenty eight (SFP28) Fiber Network Module for delivering robust performance and Cloud networking needs of growing businesses, data centers and high-end campus networks.

Product Highlights

- Multi-vendor platform compatible
- Up to 10km on SMF
- Supports data rate 24.3Gbps - 26.5Gbps with CDR engaged mode and data rate 9.95Gbps - 10.31Gbps with CDR bypassed mode
- Hot-pluggable SFP28 footprint
- 1310nm DFB laser transmitter and PIN PD Receiver
- Duplex LC connector
- Compliant with IEEE 802.3cc, IEEE 802.3ae, 10GBASE-LR and 25GBASE-LR
- Compliant with SFF-8402, SFF-8432 and SFF-8472
- Built-in Digital Diagnostic functions
- Internal CDR on both Transmitter and Receiver channel
- Application to 25GBASE-LR, 10GBASE-LR and CPRI and eCPRI Wireless Networks
- Single power supply 3.3V
- RoHS Compliant
- Operating temperature range (Case Temperature): 0°C to 70°C
- Standard and compact size, fully metallic enclosure for Low EMI

Features and Benefits

Easy to Use: COMMANDO SFP28 Transceivers are easy to use with simple and hassle-free setup. Its compact and standard size makes it ideal for all top brand devices along with COMMANDO products. Easy Installation, Plug-and-play installation with no configuration required.

25/10 Gigabit speed with Reliable performance: It provides and offers 25/10Gbps speed and supports high data rates 24.33G/25.78G(CPRI options 10/25GbE) and low data rates 9.95G/10.31G(10GbE-LW/LR) CDRs at transmitter and receiver are configured according to different signal rates. These SFP28 are well built and rigorously tested and can sustain in very rough environment to provide reliable performance.

Dust proof Enclosure: It has a resilient dust proof enclosure protects against harsh outdoor condition with no ingress of dust.

Support uninterrupted critical network infrastructure: It is protected from any hardware failures with Extra Long operational life. With this feature protect on cost and the impact to your business by losing these network devices and thus the users/servers connected to them.

Cost Efficient: State of art quality product that can serve with world's top brand products along with COMMANDO devices on real time high-speed Performance, highly reliable, conformance to international open standards, durable, serviceable, aesthetics, perceived quality, enhanced performance leads to value to money.

Green Technology: It automatically adjusts power consumption according to the link status to limit the carbon footprint of your network. It also complies with RoHS, prohibiting the use of certain hazardous materials. Moreover, most of the packaging material can be recycled and reused.

Hardware

High Performance

- Low power consumption <1W typically, saving power
- 100us typical latency, MTBF over 1 million hours
- SFP28 Multi source Agreement (MSA) Compliant
- Input Voltage: 3.1V DC to 3.5V DC Maximum / 3.3V DC Typical.
- Input Current 300mA Maximum / 200mA Typical.

Extra Long operational life

- Stainless steel material
- Anti-corrosion and salt spray resistance
- Storage Relative Humidity: 5% to 95%
- Exceptional Performance in Harsh Outdoor Climates with dust proof enclosure ensuring it can withstand harsh outdoor and indoor environments.

Operating temperature range

- Commercial temperature range: 0 to 70°C (32 to 158°F)
- COMMANDO Extended temperature range: -5°C to 85°C (23 to 185°F)
- Storage temperature range: -40 to 85°C (-40 to 185°F)

Table 1 COMMANDO SFP28 Hardware Specifications Comparison

Product Code	Form Factor	Maximum Speed	IEEE Standard Compliance	Connector Type	TX Power (dBm)	Receiver Sensitivity (dBm)
SFP-SM-1G	SFP	1000Mbps	1000BASE-LX/LH	LC duplex	-9.5 ~ -3dBm	< -23dBm
SFP-MM-1G	SFP	1000Mbps	1000BASE-SX	LC duplex	-9.5 ~ -3dBm	< -17dBm
SFP-UTP-1G	GBIC-T, SFP	1000Mbps	1000BASE-T	RJ-45	Standard	<1W
SFP-SR-10G	SFP+	10.3125Gbps	10GBASE-SR	LC Duplex	-7.3~-1dBm	< -11.1dBm
SFP-LR-10G	SFP+	10.3125Gbps	10GBASE-LR	LC Duplex	-8.2~-0.5dBm	<-14.4dBm
SFP-ER-10G	SFP+	10.3125Gbps	10GBASE-ER	LC Duplex	-7.3~-1dBm	< -11.1dBm
SFP-ZR-10G	SFP+	11.3Gbps	10GBASE-ZR	LC Duplex	0~5dBm	<-23dBm
SFP-UTP-10G	10GBASE-T, SFP+	10Gbps	10GBASE-T	Copper Cat 6a/7	Standard	<1W
SFP-SR-25G	SFP28	25.78Gbps	25GBASE-SR	LC Duplex	-9.40 --3.40	-10.3dBm
SFP-LR-25G	SFP28	26.5Gbps	25GBASE-LR	LC Duplex	-7.97--2.8	14.4/-13.3dBm
QSFP-SR4-40G	QSFP+	41.2Gbps	40GBASE-SR4	MTP/MPO-12 Male	-7.6~1dBm	<-11.1dBm
QSFP-LR4-40G	QSFP+	44.6Gbps	40GBASE-LR4	LC duplex	-7~2.3dBm	<-11.5dBm
QSFP-SR4-100G	QSFP28	103.1 Gbps	100GBASE-SR4	MTP/MPO-12	-8.4~2.4dBm	<-10.3dBm
QSFP-LR4-100G	QSFP28	103.125Gbps	100GBASE-LR4	LC duplex	-4.3~4.5dBm	<-10.6dBm

Specifications

COMMANDO SFP-LR-25G SFP28 is used for speed 25/10Gbps Ethernet fiber speed and It is a compact, hot-swappable device that plugs into a physical port of a network device. SFP+ optics are used in communication networks and have a transmitting side (Tx) and a receiving side (Rx) work with 1310nm wavelengths & supports up to 10Km link lengths over LC duplex SMF fiber.

Table 2. COMMANDO SFP28 Model Comparison

Product Code	Center Wavelength (nm)	Media Type	Max Transmission Distance	Digital Diagnostics Monitoring Supported
SFP-SM-1G	GBIC-LX/LH, 1310nm	MMF/SMF	550m/20km	DDM
SFP-MM-1G	GBIC-SX, 850nm	MMF	550m	DDM
SFP-UTP-1G	GBIC-T, RJ-45	Copper	100m	Standard
SFP-SR-10G	10GBASE-SR, 850nm	MMF	300m	DDM
SFP-LR-10G	10GBASE-LR, 1310nm	SMF	20km	DDM
SFP-ER-10G	10GBASE-ER, 1550nm	SMF	40km	DDM
SFP-ZR-10G	10GBASE-ZR/ZW, 1550nm	SMF	80km	DDM
SFP-UTP-10G	10GBASE-T RJ-45	Copper Cat 6a/7	80m	Standard

SFP-SR-25G	25GBASE-SR, 850nm	MMF	70/100m	DDM
SFP-LR-25G	10GBASE-LR/25GBASE-LR, 1310nm	SMF	10km	DDM
QSFP-SR4-40G	40GBASE-SR4, 850nm	MMF	100m	DDM
QSFP-LR4-40G	40GBASE-LR4, 1310nm	SMF	10km	DDM
QSFP-SR4-100G	100GBASE-SR4, 850nm	MTP/MPO- 12, MMF	100m	DDM
QSFP-LR4-100G	100GBASE-LR4, 1310nm	LC Duplex, SMF	10km	DDM

General Specifications

Parameter	Symbol	Min	Typ	Max	Unit	Remarks
Data Rate1	DR1	24.3	-	26.5	Gb/s	1
Data Rate2	DR2	9.95	-	10.31	Gb/s	2
Bit Error Rate1	BER1	-	-	5×10^{-5}	-	3
Bit Error Rate2	BER2	-	-	10^{-12}	-	4
Operating Temperature	T _c	0	-	70	°C	5
		-40	-	85	°C	5
Storage Temperature	T _{STO}	-40	-	85	°C	6
Supply Current (Commercial Temperature)	I _{CC}	-	200	350	mA	7
Supply Current (Industrial Temperature)	I _{CC}	-	200	400	mA	7
Input Voltage	V _{CC}	3.14	3.3	3.46	V	-
Power Dissipation (Commercial	P _c	-	0.75	1.1	W	-

Temperature)						
Power Dissipation (Industrial Temperature)	P _I	-	0.75	1.2	W	-
Maximum Voltage	V _{MAX}	-0.5	-	4	V	7

Notes:

1. IEEE 802.3cc & IEEE 802.3ae
2. Measured with data rate at 25.78Gb/s, PRBS 2³¹ 1
3. Measured with data rate at 10.31Gb/s, PRBS 2³¹ 1
4. Case temperature
5. .Ambient temperature
6. For electrical power interface

Link Distances

Data Rate	Fiber Type	Distance Range (km)	Remarks
10.31 Gb/s or 25.78 Gb/s	9/125um SMF	10	1

Note:

1. This module requires RS-FEC on the host ports for operation at 25G

Optical – Characteristics – Transmitter

V_{cc}=3.14V to 3.46V, T_c

Parameter	Symbol	Min	Typ	Max	Unit	Remarks
Output Optical Power (24.33Gb/s - 25.78Gb/s)	PTX1	-7	-	2	dBm	1
Output Optical Power (9.95Gb/s - 10.31Gb/s)	PTX2	-8.2	-	0.5	dBm	1

Optical Center Wavelength	λ_c	1295	1310	1325	nm	-
Transmitter and Dispersion Penalty	TDP	-	-	2.7	dB	-
Extinction Ratio	ER	3.5	-	-	dB	-
Spectral Width (-20dB)	$\Delta\lambda$	-	-	1	nm	-
Side Mode Suppression Ratio	SMSR	30			dB	-
Transmitter Reflectance	-	-	-	-12	dB	-
Launch Power of OFF Transmitter	POUT_OFF	-	-	-30	dBm	1

Notes:

1. Average

Optical – Characteristics – Receiver

$V_{CC}=3.14V$ to $3.46V$, T_c

Parameter	Symbol	Min	Typ	Max	Unit	Remarks
Optical Center Wavelength	λ_c	1260	-	1390	nm	-
Receive Overload	POL	2	-	-	dBm	-
Receiver Sensitivity @25.78Gb/s	RX_SEN1	-	-	-13.3	dBm	1
Receiver Sensitivity @10.31Gb/s	RX_SEN2	-	-	-14.4	dBm	2
Receiver Reflectance	TR _{RX}	-	-	-26	dB	-
LOS Assert	LOS _A	-30	-	-	dBm	-
LOS De-Assert	LOS _D	-	-	-17	dBm	-
LOS Hysteresis	LOS _H	0.5	-	-	dB	-

Notes:

1. Average, measured with data rate at 25.78Gb/s, PRBS 2³¹-1.
2. Average, measured with data rate at 10.31Gb/s, PRBS 2³¹-1.

Electrical – Characteristics – Transmitter

$V_{CC}=3.14V$ to $3.46V$, T_C

Parameter	Symbol	Min	Typ	Max	Unit	Remarks
Input differential impedance	R _{IN}	-	100		Ω	-
Differential data input swing	V _{IN PP}	200	-	900	mV	-
Transmit Disable Voltage	V _D	2	-	V _{CC}	V	-
Transmit Enable Voltage	V _{EN}	V _{EE}	-	V _{EE} +0.8	V	-

Electrical – Characteristics – Receiver

$V_{CC}=3.14V$ to $3.46V$, T_C

Parameter	Symbol	Min	Typ	Max	Unit	Remarks
Differential data output swing	V _{OUT PP}	300	-	1000	mV	-
LOS Assert	V _{LOS A}	2	-	V _{CC} HOST	V	-
LOS De-Assert	V _{LOS D}	V _{EE}	-	V _{EE} +0.8	V	-

Digital Diagnostic Monitor (DDM) Functions

COMMANDO SFP-25G-LR transceiver module supports the 2-wire serial communication protocol as defined in SFF-8472. Digital diagnostic information is accessible over the 2-wire interface at address 0xA2. Digital diagnostics for the transceiver are internally calibrated by default. A micro controller unit inside the transceiver gathers the monitoring information and reports the status of transceiver, such as Transceiver Temperature, Supply Power, TX bias current, TX output power and RX received optical power.

DDM Threshold Information


Parameter		Alarm Threshold		Warning Threshold	
		High Value	Low Value	High Value	Low Value
Temperature (°C)	C	90 (5A 00)	-10 (F6 00)	85 (55 00)	-5 (FB 00)
	I	90 (5A 00)	-45 (D3 00)	85 (55 00)	-40 (D8 00)
Vcc (V)		3.63(8D CC)	2.97 (74 04)	3.46(87 28)	3.13 (7A 44)
Bias (mA)		100(C3 50)	2 (03 E8)	80 (9C 40)	4 (07 D0)
TxPower (dBm)		2.8 (4A 4A)	-7.97 (06 3C)	2.0 (3D E8)	-7.0 (07 CB)
RxPower (dBm)		3.5 (57 A8)	-18.0 (00 9E)	0.5 (2B D4)	-15.0 (01 3C)

Product Weight

Net weight of module : 18.0g/pcs

Net weight of dust cap : 0.95g/pcs

Dimensions

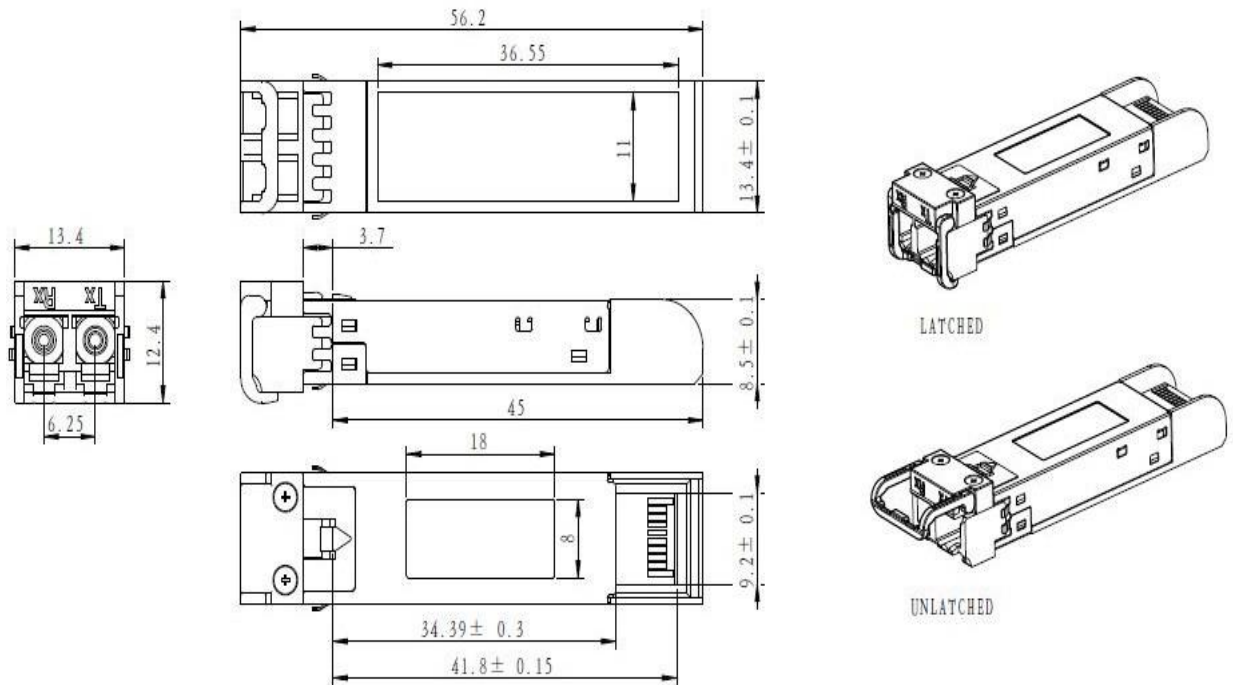

All dimensions are ±0.2mm unless specified otherwise

Unit: mm

Included in the bundle/box

All COMMANDO SFP-LR-25G, SFP28 Transceivers are made available for use globally along with accessory used to facilitate or enhance operations. COMMANDO SFP-LR-25G, SFP28 Transceivers Comes with following Accessories.

1x (COMMANDO 25G SFP28 Transceiver Module) SFP-LR-25G

Support and Warranty

- Same-day assistance.
- Comprehensive 24-hour support using common communication/chat platforms, Email and Telephone.
- Provide FAQs and troubleshooting help online (self-service) through cloud-based solutions.
- Highly technical and trained representatives to resolve issues.
- One-year default warranty with option of warranty extension up to 3 years

Table 3. Support and Warranty

Warranty and Support	
Products covered	COMMANDO FiberX 10/25GBASE-LR, SFP28, 1310nm, 10km, SMF, DDM (SFP-LR-25G)
Warranty duration	One Year RTB (Return To Base) replacement warranty – optionally extendable up to 3 years.
Hardware replacement	COMMANDO, its resellers or its service center will use commercially reasonable efforts to replace the product subject to stock availability. Otherwise, a replacement will be arranged within 15 working days after receipt of the Return Materials Authorization (RMA) request.
End-of-life policy	In case of discontinuation of the product, support is limited to 3 years from announcement date.
Effective date	Hardware warranty commences from the date of shipment to customer (and in case of resale by a COMMANDO reseller, not more than 90 days after original shipment by COMMANDO).
Support duration	Lifetime support.
COMMANDO Care	COMMANDO will provide 24x7 support for basic configuration, diagnosis, and troubleshooting of device-level problems for up to one year from the date of shipment of the originally purchased product. This support does not include solution or network-level support beyond the specific device under consideration.
Online Portal Access	Warranty allows guest access to commandonetworks.com for all available technical queries.

Ordering Information

Ordering information for the COMMANDO SFP-LR-25G, SFP28 Transceivers, To place an order, please contact your local reseller/distributor or COMMANDO Sales Representative at www.commandonetworks.com/rfq

Table 4. Ordering Information

Product Code	Description
SFP-EPON	COMMANDO FiberX EPON SFP Class PX20++++, 1.25Gbps, 1490nm/1310nm, DDM, 20km
SFP-GPON	COMMANDO FiberX GPON SFP Class C++++, 2.5G/1.25G, 1490nm/1310nm, DDM, 20km
SFP-XPON	COMMANDO FiberX XPON SFP, 1.25G/2.5G, 1490nm/1310nm, DDM, 20km
SFP-XGSPON	COMMANDO FiberX XGSPON 10G SFP+, 1577nm/1270nm, DDM, 20km
SFP-SM-1G	COMMANDO FiberX 1000BASE-LX/LH, SFP, 1310nm, 20km, SMF, DDM
SFP-MM-1G	COMMANDO FiberX 1000BASE-SX, SFP, 850nm, 550m, MMF, DDM
SFP-UTP-1G	COMMANDO CopperX 1000BASE-T SFP, RJ45, 100m, Standard
SFP-SR-10G	COMMANDO FiberX 10GBASE-SR, SFP+, 850nm, 300m, MMF, DDM
SFP-LR-10G	COMMANDO FiberX 10GBASE-LR, SFP+, 1310nm, 10km, SMF, DDM, Multi-brand
SFP-ER-10G	COMMANDO FiberX 10GBASE-ER, SFP+, 1550nm, 40km, SMF, DDM
SFP-ZR-10G	COMMANDO FiberX 10GBASE-ZR/ZW, SFP+, 1550nm, 80km, SMF, DDM
SFP-UTP-10G	COMMANDO CopperX 10GBASE-T RJ45, SFP+, 30m, Cat 6a/7, Multi-brand
SFP-LR-10G-20K	COMMANDO FiberX 10GBASE-LR, SFP+, 1310nm, 20km, SMF, DDM, Multi-brand
SFP-UTP-10G-80M	COMMANDO CopperX 10GBASE-T RJ45, SFP+, 80m, Ultra-long, Cat 6a/7, Multi-brand
SFP-SR-25G	COMMANDO FiberX 25GBASE-SR, SFP28, 850nm, 70/100m, OM3/4 MMF, DDM, Multi-brand
SFP-LR-25G	COMMANDO FiberX 10/25GBASE-LR, SFP28, 1310nm, 10km, SMF, DDM, Multi-brand
QSFP-SR4-40G	COMMANDO FiberX 40GBASE-SR4, QSFP+, 850nm, 100m, MMF, DDM
QSFP-LR4-40G	COMMANDO FiberX 40GBASE-LR4, QSFP+, 1310nm, 10km, SMF, DDM
QSFP-SR4-100G	COMMANDO FiberX 100GBASE-SR4, QSFP28+, 850nm, 100m, MTP/MPO-12, MMF, DDM
QSFP-LR4-100G	COMMANDO FiberX 100GBASE-LR4, QSFP28+, 1310nm, 10km, SMF, DDM

Document History

Release	What's new	Date
Release 1	First Release	March 24, 2021
Release 2	Multi-brand compatible model launch	November 9, 2022
Release 3	Model adjustment	September 18, 2023
Release 4	25G Model added	October 13, 2023